


Thank you for purchasing this Autel tool. Our tools are manufactured to a high standard and — when used according to these instructions and properly maintained — will provide years of trouble-free performance.

MaxiSys MS906 MAX

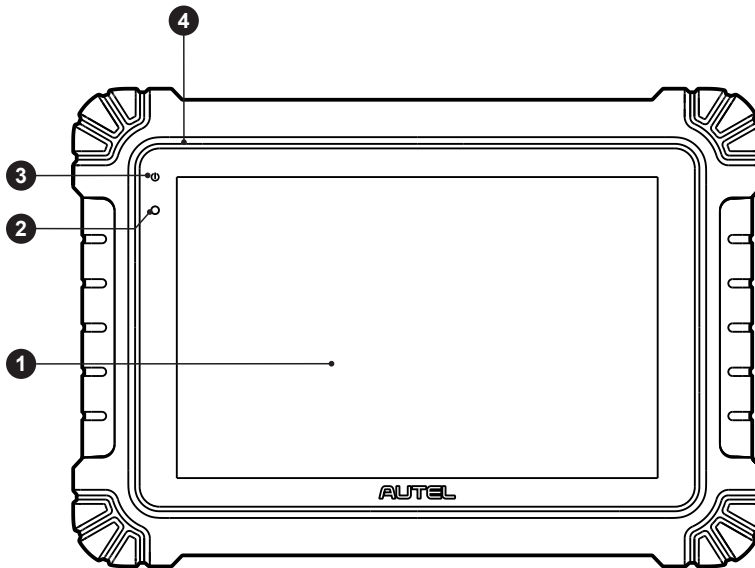


PRODUCT DESCRIPTIONS


The MaxiSys system has two main components:

- MaxiSys Tablet — the central processor and monitor for the system
- MaxiVCI V200 — the vehicle communication interface

1. 10.1-inch TFT-LCD Capacitive Touchscreen
2. Ambient Light Sensor — detects ambient brightness.
3. Power LED
4. Built-in Microphone

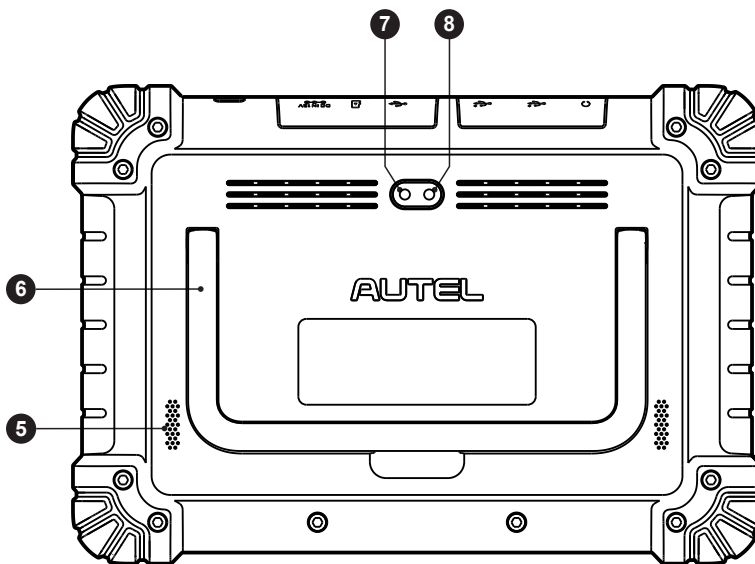


5. Speaker
6. Collapsible Stand — extends from the back to allow hands-free viewing of the tablet.
7. Rear Camera
8. Camera Flash

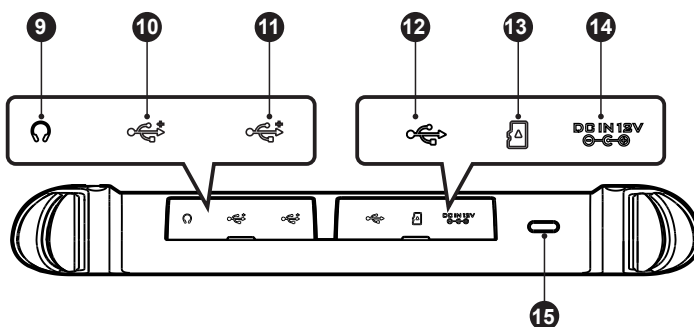

9. Headphone Jack
10. USB Port
11. USB Port
12. Mini USB Port
13. Mini SD Card Slot
14. DC Power Supply Input Port
15. Power/Lock Button — long press to turn on/off the tablet, or short press to lock the screen.

Vehicle Communication Interface — MaxiVCI V200

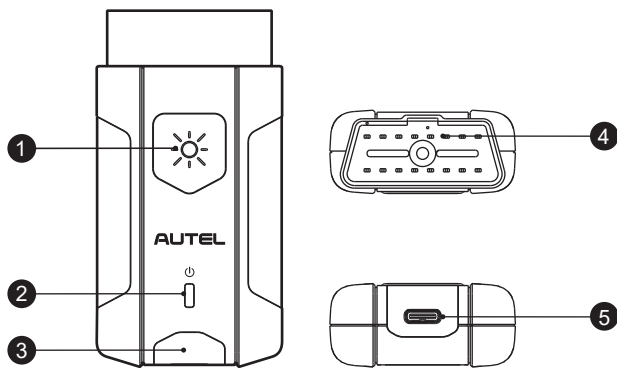

1. Flashlight Power Button
2. Power LED — refer to VCI LED Description for details.
3. Vehicle/Connection LED — refer to VCI LED Description for details.
4. Vehicle Data Connector (16-pin)
5. USB Port

VCI LED Description

LED	Color	Description
Power LED	Yellow	The VCI is powered on and performing self-check.
	Green	The VCI is ready for use.
	Flashing Red	The firmware is updating.
Vehicle/Connection LED	Green	<ul style="list-style-type: none"> • Solid Green: The VCI is connected via USB cable. • Flashing Green: The VCI is communicating via USB cable.
	Blue	<ul style="list-style-type: none"> • Solid Blue: The VCI is connected via Bluetooth. • Flashing Blue: The VCI is communicating via Bluetooth.


Getting Started



IMPORTANT: Before operating or maintaining this unit, please read these instructions carefully, paying extra attention to the safety warnings and precautions. Failure to use this product properly may cause damage and/or personal injury and will void the product warranty.

1

- Press and hold the **Power/Lock** button to turn on the tablet. Ensure the tablet has a charged battery or is connected to power supply using the supplied power adapter.

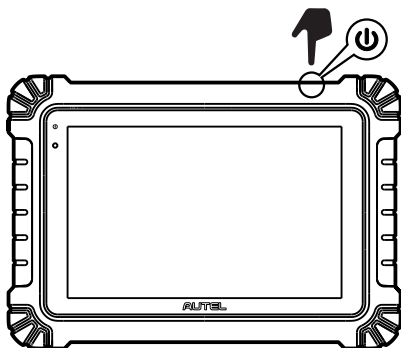


2

- Scan the QR code below to visit our website at pro.autel.com.
- Create an Autel ID and register the product with its serial number and password.



3

- Insert the MaxiVCI V200 into the vehicle's DLC, which is generally located under the vehicle dashboard.

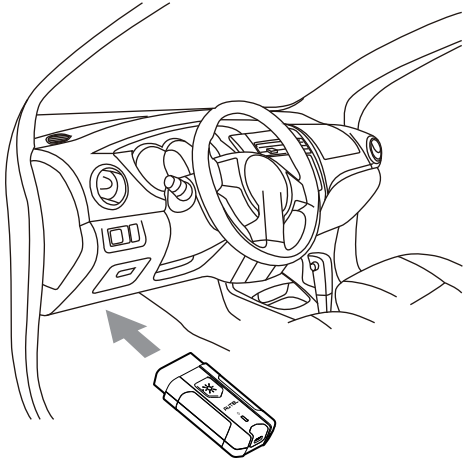**4**

- Connect the tablet with the MaxiVCI V200 via either Bluetooth or a USB Type-C cable to establish a communication.
- When the MaxiVCI V200 is properly connected to the vehicle and the tablet, the VCI status button on the bottom bar of the screen will display a green badge at the corner, indicating the tablet is ready to start vehicle diagnosis.

